




## SA575 | SA-675 In-Ceiling Speakers


### Features:

- Available in 2 sizes: 5.25" (SA-575) | 6.5" (SA-675).
- Silk dome tweeters and Polypropylene woofers.
- High power handling.
- Ultra-fast response capacitors.
- L-clip clamping mechanism.
- Paintable grills and frame.
- Includes rough-in bracket.
- 10 Year Warranty.

#### SA-575 Rough-in bracket cut-out size.

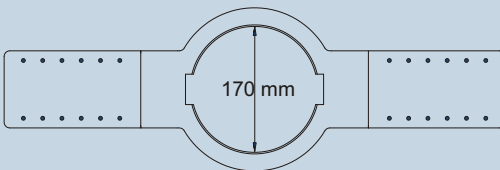

#### SA-675 Rough-in bracket cut-out size.

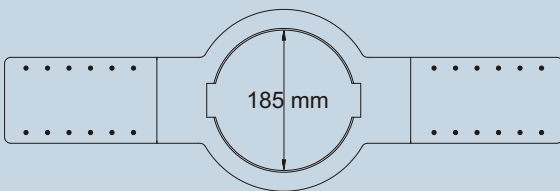

Sound Acoustics professional in-ceiling speakers blend seamlessly into any environment providing crystal clear audio reproduction. They feature high output woofers and silk dome swivel tweeters for deep bass and smooth high frequency response. All Sound Acoustics ceiling speakers include pre-construction brackets and a 10 warranty. Sound Acoustics is the professional installers first choice for high quality sound installations.

### Specifications:

- Grill: Steel Mesh (paintable).
- Frame: ABS plastic (paintable).
- Mounting System: Rotating L-Clips.

#### SA-575

- Power Handling: 80W RMS.
- Frequency Response: 60Hz - 40 KHz.
- Sensitivity: 92dB.
- Impedance: 8 Ohm.
- Woofer: 5.25" mica filled polypropylene cone /rubber edge.
- Tweeter: 1" silk dome super tweeter - swivels.
- Crossover Frequency: 2.5kHz.
- Overall Dimensions: 191mm
- Cutout Dimensions: 170mm
- Mounting Depth: 70mm

#### SA-675

- Power Handling: 100W RMS
- Frequency Response: 50Hz - 40kHz
- Sensitivity: 92dB
- Impedance: 8 Ohm
- Woofer: 6.5" mica filled polypropylene cone /rubber edge.
- Tweeter: 1" silk dome super tweeter - swivels.
- Crossover Frequency: 2.5kHz.
- Overall Dimensions: 204mm
- Cutout Dimensions: 185mm
- Mounting Depth: 74mm

### Optional Accessories:



**PRO-VC2**  
Sliding Volume  
Control.

**PRO-VC2IR**  
Sliding Volume  
Control with  
Infrared.



**PRO-WT6**  
Parallel Wiring  
Connection Module.

**SA-44**  
Multi Zone / Multi Source  
Amplifier.

